


**CITY CRANE MD 170**

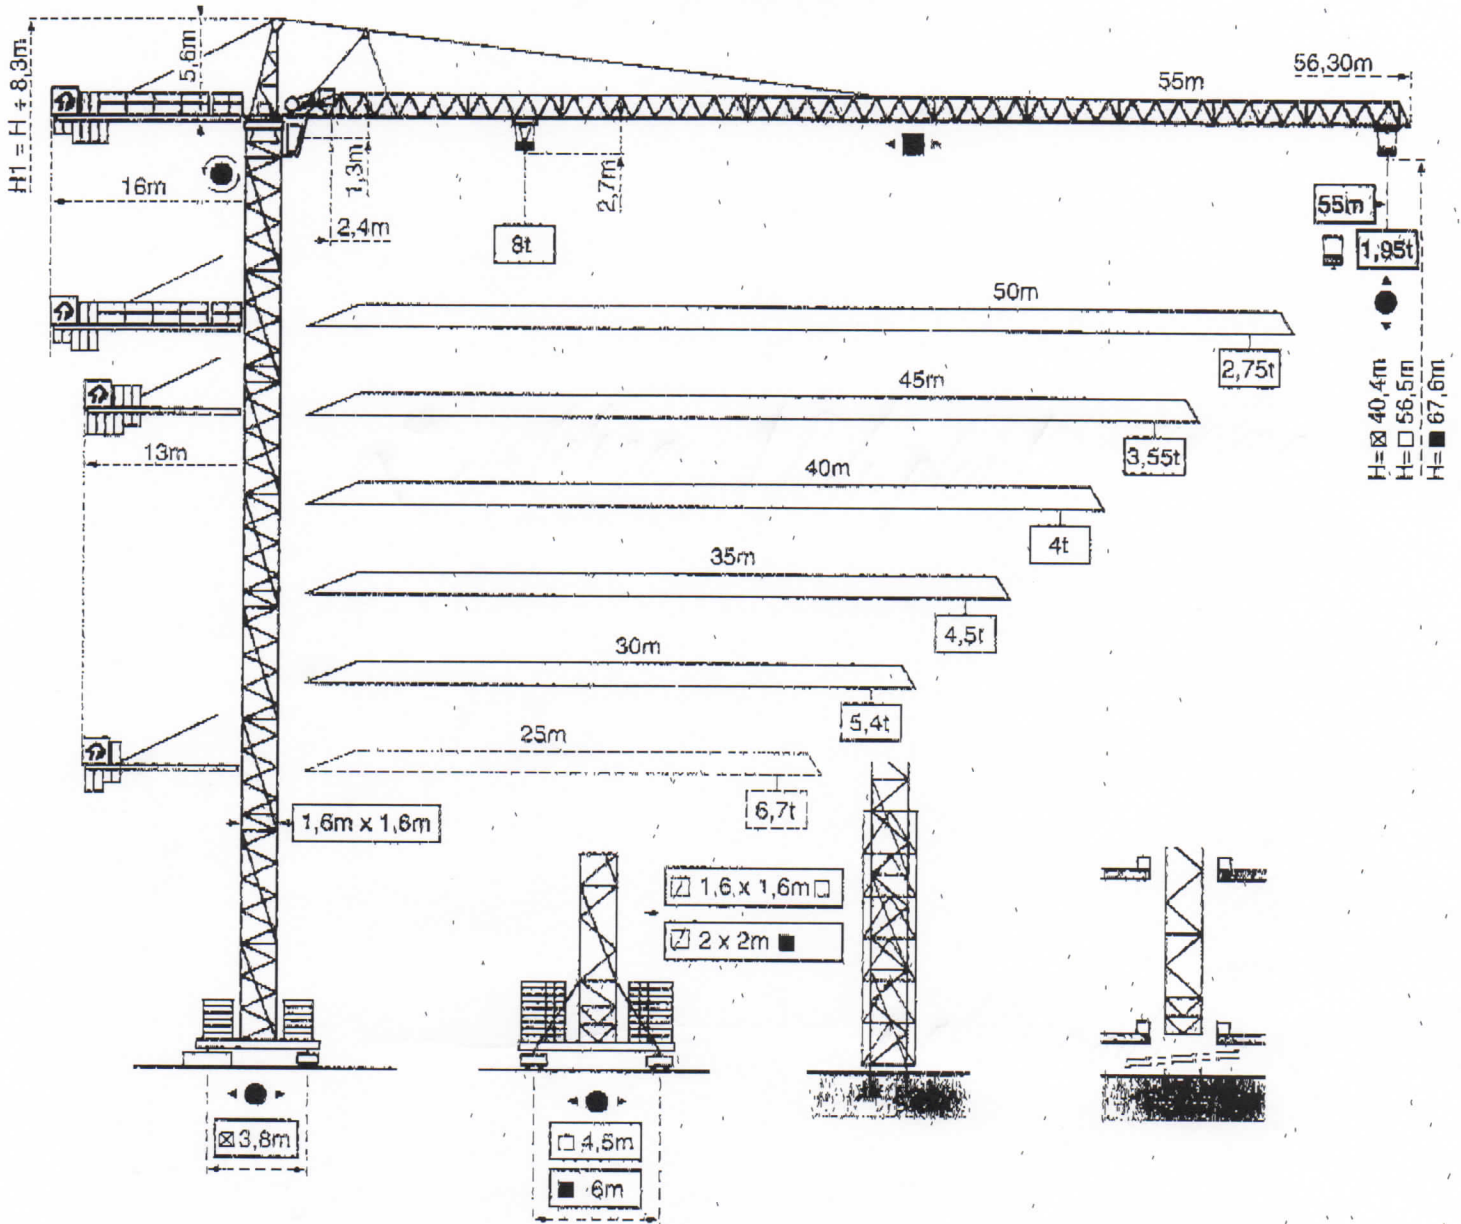

# CITY CRANE MD 170

LJJ 1

# POTAIN

TÜV Cert  
  
 POTAIN ISO 9001 POTAIN  
 LLOYD'S RQA

**POTAIN** CITY CRANE MD 170

CITY  $\square$  1,60m



Mat - Mast - Mast - Mástil - Torre

KM 406 E






KM 407 E



$H_{\square} = H_{\square} / \square + 0,3 \text{ m}$

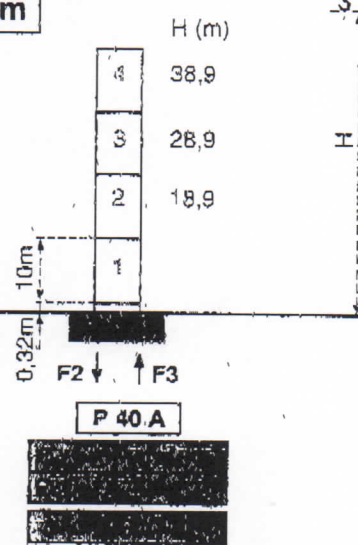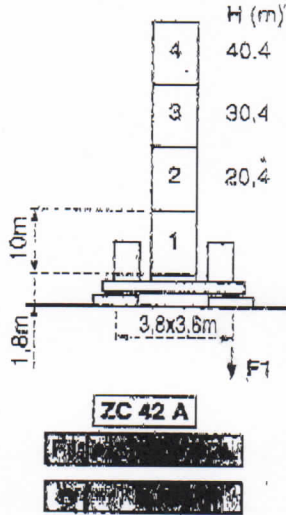

ZC 42A



**TELESCOPABLE - TELESKOPIERBAR - TELESCOPIC - TELESCOPICO - TELESCOPICO**

K 407 B

K 407 E








Mats - Maste - Masts - Mástil - Torre  $\square$  1,60m

K 407 A

K 409 A



K 407 C

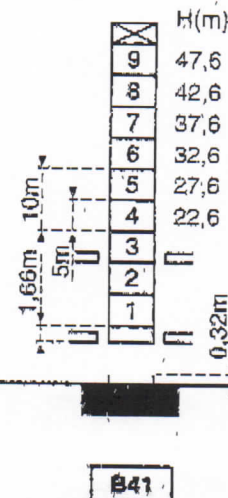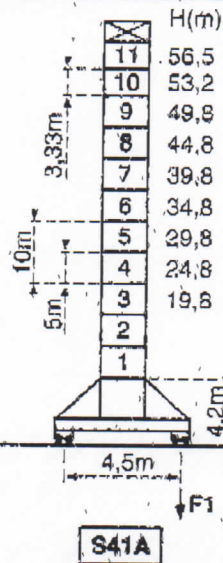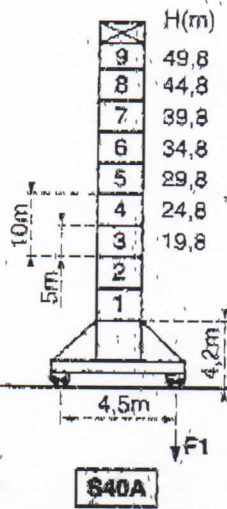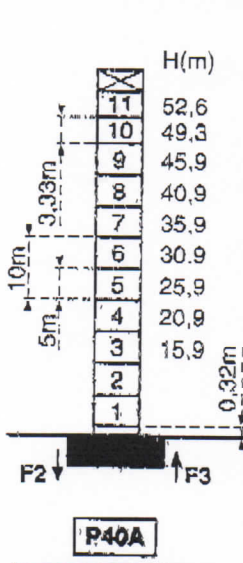

- En service
- Hors service

- In Betrieb
- Ausser Betrieb

⊗ A vide sans lest avec flèche et hauteur

⊗ Ohne Last und Ballast mit Maximalausleger und

- In service
- Out of service

⊗ Without load and ballast with longest jib


- En servicio
- Fuera de servicio

⊗ Sin carga, sin lastre con flecha y

- In servizio
- Fuori servizio


⊗ A vuoto senza zavorra e con braccio massimo e

Flèche Ausleger Jib Flecha Braccio

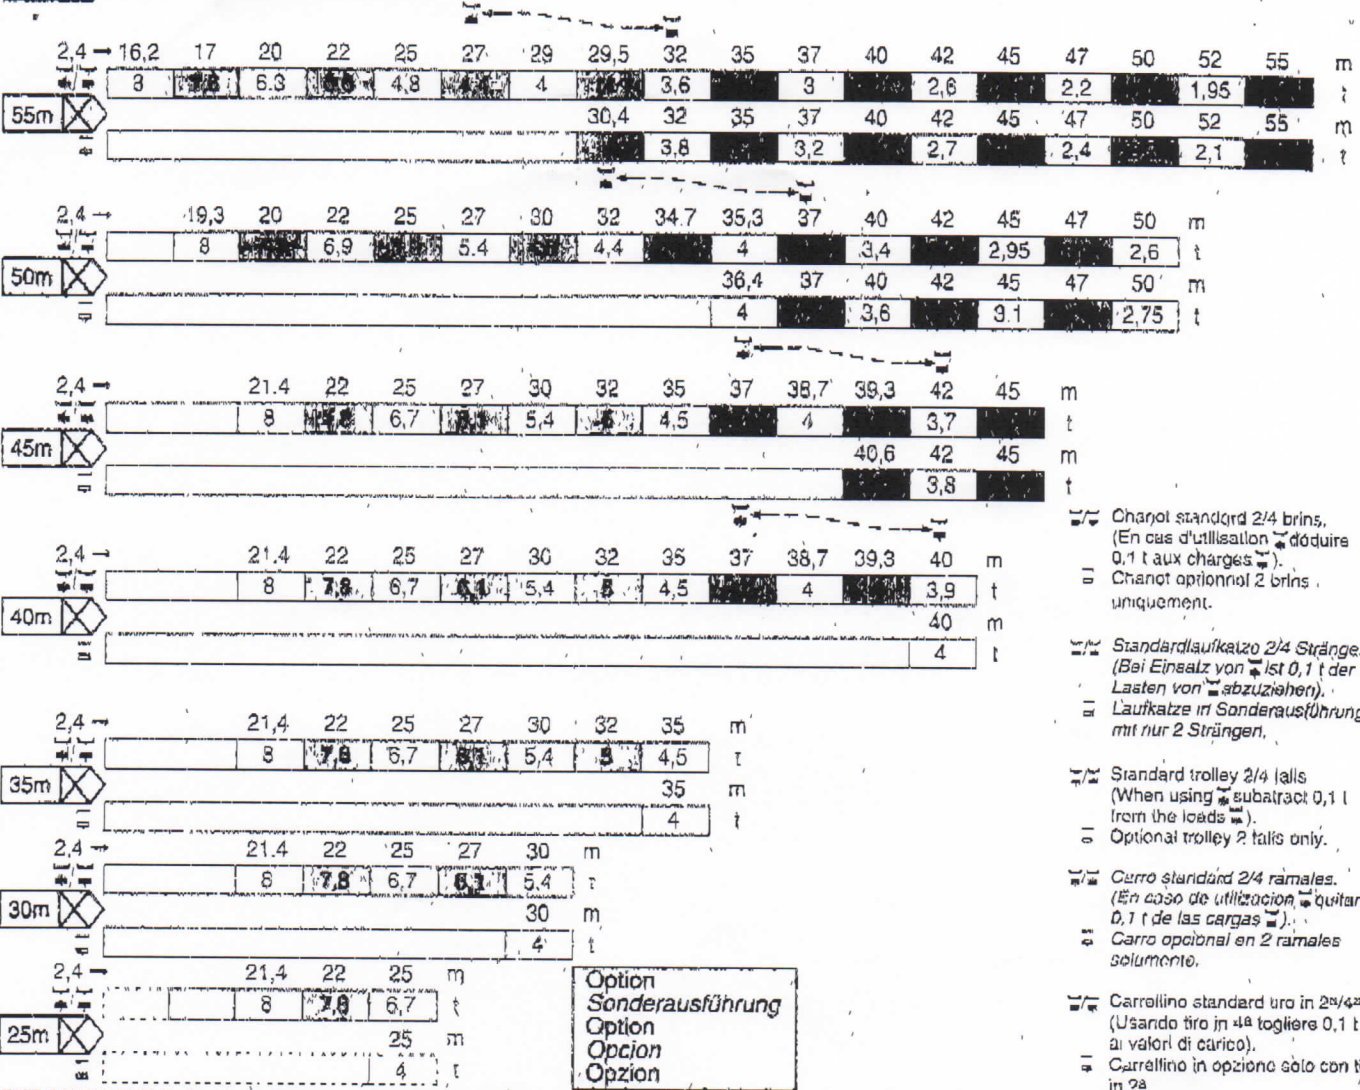







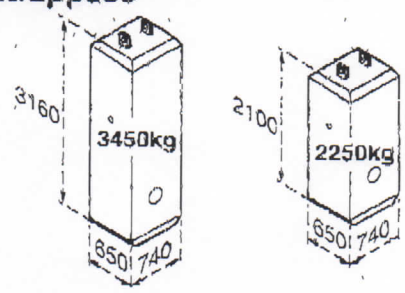
























Lest de contre-flèche - Gegenauslegerballast - Counter-jib ballast  
 Lastre de contra flecha - Contrappeso

		(kg)
55m	16m	18 300
50m	16m	16 050 (4x3450)+(1x2250)
45m	13m	20 750 (5x3450)+(1x2250)
40m	13m	19 500 (5x3450)+(1x2250)
35m	13m	17 250 (3x3450)+(1x2250)
30m	13m	14 950 (3x3450)+(2x2250)
25m	13m	12 600 (3x3450)+(1x2250)



Lest de base - Grundballast - Base ballast - Lastre de base - Zavorra di base

H (m)	55-40m		H (m)	55-40m		H (m)	55-40m		H (m)	55-25m	
	55-40m	35-25m		55-40m	35-25m		55-40m	35-25m		55-25m	
									64,3	108t	
						53,2	78t	84t	56	72t	
			49,8	60t	72t						
			44,8	54t	60t	44,8	54t	60t	46	36t	
40,4	75t	80t	39,8	54t	60t						
			34,8	54t	54t	34,8	54t	54t	36	24t	
30,4	70t	80t	29,8	48t	48t	29,8	48t	48t	26	24t	
			24,8	48t	48t	24,8	48t	48t	26	24t	
20,4	70t	80t	19,8	48t	48t	19,8	48t	48t	24	24t	
	ZC 42 A			S 40 A			S 41 A			V 60 A	

				m/min	t		ch-PS hp	kW
Levage Heben Hoisting Elevación Sollevamento	33PC20 	  	  				280 m > 280 m*	33 24
	33LVF20 	  	  					280 m > 280 m*
Distribution - Katzfahren - Trolleying Distribución - Distribuzione		5 D3 V4					5	3,7
Levage Heben Hoisting Elevación Sollevamento	50LVF20 	  	  				590 m > 590 m*	50 37
	Distribution - Katzfahren - Trolleying Distribución - Distribuzione		6 DVF 4		0 - 0,8 Dreh U/min			5,5
Orientation - Schwenken - Slewing Orientación - Rotazione		RCV 145		0 - 0,8 Dreh U/min			2 x 6	2 x 4,4
Translation Kranfahren Travelling Traslación Traslazione	ZC42A 	RT 324		12,5 - 25			2 x 7	2 x 5,2
	S 40 A 	RT 324		12,5 - 25			2 x 7	2 x 5,2
	S 41 A  R ≥ 10 m	TCV 449 ARC H ≤ 34,8 m		10 - 50			4 x 6,8	4 x 5
	S 41 A  R ≥ 10 m	RT 443 A1 2V		15 - 30			4 x 5	4 x 3,7
	V 60 A  R ≥ 10 m	TCV 449 ARC H ≤ 34,8 m		10 - 50			4 x 6,8	4 x 5
	V 60 A  R ≥ 13 m	RT 644 A1 2V		13,5 - 27			4 x 7	4 x 5,2
		TCV 649 ARC H ≤ 41 m		10 - 50			4 x 6,8	4 x 5
Réseau - Netzstrom - Mains supply - Red - Rete elettrica						CEI 38 IEC 38	400V(+6%-10%) 50 Hz	
Puissance électrique nécessaire - Anschlusswert - Necessary electric power Potencia eléctrica necesaria - Potenza elettrica necessaria							33 PC : 50 kVA 33 LVF : 50 kVA 50 LVF : 70 kVA	
Groupe électrogène - Stromaggregat - Generator set - Grupo electrogeno - Gruppo elettrogeno								

\*Nous consulter - Auf Anfrage - Consult us - Consultarnos - Consultateci

Conforme aux directives CEE 84/534 et 87/405 sur le niveau acoustique - Gemäss EWC-Richtlinien 84/534 und 87/405 für den Schall-Leistungspegel  
 In compliance with the EEC 84/534 and 87/405 instructions on noise level - Conforme con las directivas CEE 84/534 y 87/405 sobre el nivel acústico  
 Conforme alle direttive CEE 84/534 e 87/405 sul livello acustico

